

masibus[®]

A Sonepar Company



Calibrators & Calibration

Masibus Designed India' First Digital Calibrator in 1979


INTRODUCTION

WHAT IS CALIBRATION?

Calibration refers to the process of adjusting or measuring an instrument or system to ensure that it produces accurate and reliable results. In other words, it involves comparing the readings or output of a device to a standard or known value to determine its accuracy and correct any discrepancies.



CALIBRATION IS REQUIRED FOR

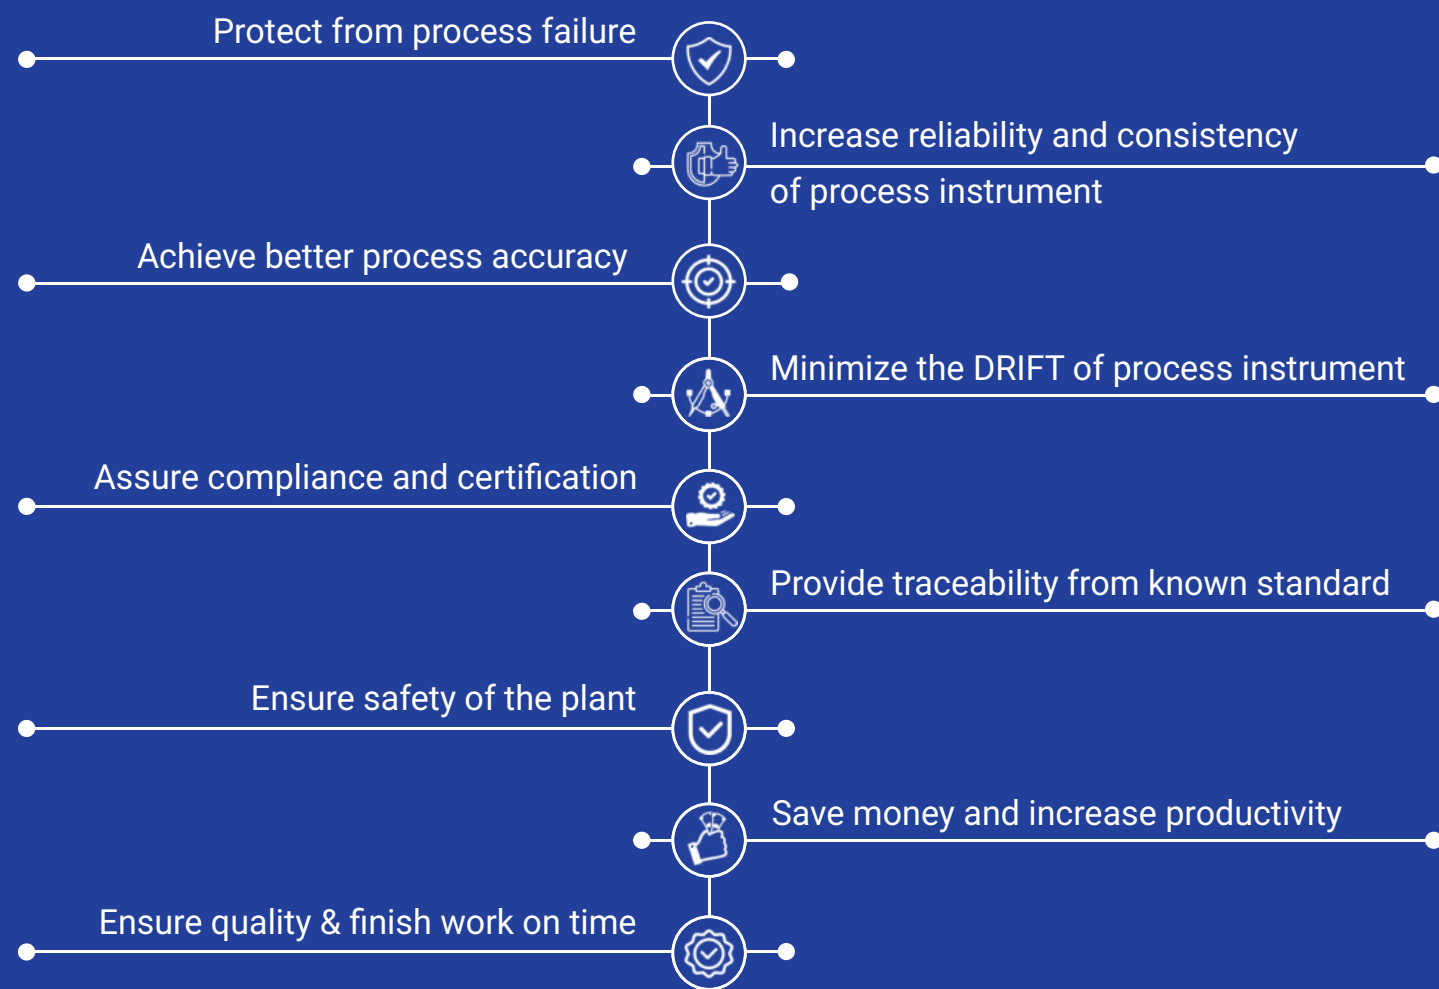

masibus®

A Sonepar Company

tCAL

TC12+ Temperature Calibrator



Portable multifunction temperature calibrator with high accuracy in all modes of operation.

Graphical user interface for precise measuring and sourcing of electrical and physical parameters.

Designed to give maximum battery life in one full charge, the backlight is adjustable for power saving.

Shortcut keys to operate easily for input selection for measure and source/ measure respectively.

Comes with a mini USB connector for charging, logged data retrieval and firmware upgrade.

Sourcing and measurement capabilities with independent parameter and range selection.

It has mA/ V/ mV/ mA (2W)/ switch- test / RTD/ TC/ measurement capability & also has resistance/ RTD/ TC source capability.

TECHNICAL SPECIFICATIONS

Measurement & Simulation Range			
Parameters	Range	Resolution	Accuracy
Resistance (Ohms)	0 to 400 Ω	0.01 Ω	4 Wire measurement $\pm 0.02\%$ of reading $\pm 0.01\Omega$ Simulation: $\pm 0.02\%$ of reading $\pm 0.02\Omega$
	400 to 4000 Ω^*	0.1 Ω	4 Wire measurement: $\pm 0.02\%$ of reading $\pm 0.1\Omega$ Simulation: $\pm 0.02\%$ of reading $\pm 0.15\Omega$
Pt10 to Pt1000	-200 to 200 $^{\circ}\text{C}$	Pt10 to Pt400: 0.01 $^{\circ}\text{C}$ Pt500, Pt1000: 0.1 $^{\circ}\text{C}$	4 Wire measurement: $\pm 0.15^{\circ}\text{C}$, Simulation*: $\pm 0.15^{\circ}\text{C}$
	200 to 600 $^{\circ}\text{C}$		4 Wire measurement: $\pm 0.2^{\circ}\text{C}$, Simulation*: $\pm 0.25^{\circ}\text{C}$
	600 to 850 $^{\circ}\text{C}$		4 Wire measurement: $\pm 0.3^{\circ}\text{C}$, Simulation*: $\pm 0.35^{\circ}\text{C}$
Ni100	-60 to 180 $^{\circ}\text{C}$	0.01 $^{\circ}\text{C}$	4 Wire measurement: $\pm 0.1^{\circ}\text{C}$
Ni120	-80 to 260 $^{\circ}\text{C}$	0.01 $^{\circ}\text{C}$	Simulation*: $\pm 0.15^{\circ}\text{C}$
Cu10 to Cu100	-200 to 260 $^{\circ}\text{C}$	0 to 0.01 $^{\circ}\text{C}$	4 Wire measurement: $\pm 0.2^{\circ}\text{C}$, Simulation*: $\pm 0.8^{\circ}\text{C}$
Note: #For 4 wire Resistance measurement 0.01 Ω resolution available in 0 to 1600 Ω range *Accuracy is valid with an excitation current $>0.2\text{mA}$ (0...400 ohm), $>0.1\text{mA}$ (400...4000 ohm) **Read accuracy is based on 4-wire input. For 3-wire RTD measurements, assuming all three RTD leads are matched, add 1.0 $^{\circ}\text{C}$ Pt10 and Cu10), 0.6 $^{\circ}\text{C}$ (Pt50 and Cu50), and 0.4 $^{\circ}\text{C}$ (other RTD types) to the specifications			
Electrical Measurement Parameters & Accuracy			Compatible RTD Types
Parameter	Range	Resolution	Accuracy
V	0 to 30.00 VDC	0.001 V	$\pm 0.02\%$ of reading ± 2 count
mA	0 to 24.000 mA	0.001 mA	$\pm 0.02\%$ of reading ± 2 count
Thermocouple/mV Measurement/Simulation Resolution & Accuracy@20-30 $^{\circ}\text{C}$			General Specifications
TC Type	Range	Resolution	Accuracy \uparrow
E	-200.0 to 1000.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.3 $^{\circ}\text{C} \pm 4\mu\text{V}$
J	-200.0 to 1200.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.3 $^{\circ}\text{C} \pm 4\mu\text{V}$
K	-200.0 to 1372.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.3 $^{\circ}\text{C} \pm 4\mu\text{V}$
T	-200.0 to 400.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.3 $^{\circ}\text{C} \pm 4\mu\text{V}$
B	450.0 to 1800.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.5 $^{\circ}\text{C} \pm 4\mu\text{V}$
R	0.0 to 1750.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.5 $^{\circ}\text{C} \pm 4\mu\text{V}$
S	0 to 1750.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.5 $^{\circ}\text{C} \pm 4\mu\text{V}$
N	-200.0 to 1300.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	0.3 $^{\circ}\text{C} \pm 4\mu\text{V}$
mV	-10.000 to 80.000 mV	0.001 mV	$\pm 0.02\%$ of reading $\pm 4\mu\text{V}$
	-10.00 to 250.00 mV	0.01mV	$\pm 0.02\%$ of reading $\pm 0.02\text{mV}$
Note: Temperature standard ITS-90 \uparrow Degree equivalent to 4 μV against respective readings to be added to above mentioned accuracy for TC input.			
Power Supply			
Battery Type	Rechargeable Li-ion battery pack, 2300mAh 3.7V		
Charging Time	<5 hours max.		
Charger Supply	100-240 VAC, 50/60 Hz; Output 5V DC@1A		
Battery Life on Full Charge	Continuous operation (measure or source)		
	>17 hours		
	Continuous operation (12mA (24V) measure)		
	>9 hours		
Battery Status Indication	Battery symbol displayed with % power remaining		
Display Mode			Measure: mA/ V/ mV/ mA(2W)/ switch-test / RTD/ TC Source: Resistance/ RTD/ TC
Supported Units for RTD/ TC Type			$^{\circ}\text{C}/^{\circ}\text{F}/^{\circ}\text{K}$
RTD Measurement Current			300 μA
Maximum Resistance Excitation Current (Simulation-Resistance/ RTD mode)			3 mA (0...650 Ω) lexci 2.0V/ Rsim (650...4000 Ω)
SettlingTime (Pulsed Currents RTD Simulation)			>1 ms
CJC Error (For Thermocouple)			$\leq \pm 0.5^{\circ}\text{C}$
Internal Reference Junction			
CJC selection			Manual/ internal/ external(1)
Max. Input Voltage (EM Terminal)			30 VDC
Temperature Coefficient			≤ 30 ppm
Input Impedance			TC/ mV/ V $>1\text{M}\Omega$ mA: 10 Ω
Response Time			Input <100ms, output <100ms
Load Impedance			$>4.7\text{k}\Omega$ for TC/mV
Display Update Rate			10 readings / sec.
Isolation			500VDC between mA/V measure and RTD / Ω /TC/mV
Data logging			Logged data is stored in a user defined file in internal memory Periodic logging: 150000 readings max.
Communication Interface			USB 2.0
⁽¹⁾ with RTD sensor at RTD terminal for External CJC			

APPLICATIONS

- Calibrating and checking temperature indicator/ controllers, recorders, temperature transmitters, signal conditioners, etc.
- Laboratory and site calibration purpose
- Measure and simulate thermocouple signals
- Calibration of transmitters and transducers
- DRIFT test of transmitters and transducers

masibus®

A Sonepar Company

uCAL

UC12

Universal Calibrator



Portable multifunction calibrator with high accuracy in all modes of operation.

Graphical user interface for precise measuring and sourcing of electrical and physical parameters.

Designed to give maximum battery life in one full charge, the backlight is adjustable for power saving.

Shortcut keys to operate easily for input selection for measure and source/ measure respectively.

Comes with a mini USB connector for charging, logged data retrieval and firmware upgrade.

Sourcing and measurement capabilities with independent parameter and range selection.

It has mA/ V/ mV/ mA (2W)/ switch- test / RTD/ TC/ measurement capability & also has mA/ V/ mV/ mA(2W)/ Resistance/ RTD/ TC/ Frequency/ Pulse source capability.

TECHNICAL SPECIFICATIONS

Electrical Measurement Parameters and Accuracy				Frequency Generation	
Parameter	Range	Resolution	Accuracy	Range	Resolution
V	0 to 30.00 VDC	0.001 V	±0.02% of reading ± 2 count	0.0005 to 0.5Hz	0.00001 Hz
mA	0 to 24.000 mA	0.001 mA	±0.02% of reading ± 2 count	0.5 to 50 Hz	0.0001 Hz
Electrical Simulation Parameters and Accuracy				50 to 500 Hz	0.001 Hz
Parameter	Range	Resolution	Accuracy	500 to 5000 Hz	0.01 Hz
V	0 to 12.000 VDC	0.001 V	±0.02% of reading ± 2 count	5000 to 10000 Hz	0.1 Hz
mA	0 to 24.000 mA	0.001 mA	±0.02% of reading ± 2 count	Frequency Measurement	
Thermocouple/mV Measurement /Simulation Resolution and Accuracy				Range	Resolution
TC Type	Range	Resolution	Accuracy	0.0143 to 9.9999	0.0001 Hz
E	-200.0 to 1000.0 °C	0.1 °C	0.3 °C	10 to 99.999Hz	0.001 Hz
J	-200.0 to 1200.0 °C	0.1 °C	0.3 °C	100 to 999.99Hz	0.01 Hz
K	-200.0 to 1372.0 °C	0.1 °C	0.3 °C	1000 to 9999.9 Hz	0.1 Hz
T	-200.0 to 400.0 °C	0.1 °C	0.3 °C	10000 to 50000 Hz	1 Hz
B	450.0 to 1800.0 °C	0.1 °C	0.5 °C	Feature	Specification
R	0.0 to 1750.0 °C	0.1 °C	0.5 °C	Trigger Level	0 to 12V in 1 V Steps
S	0 to 1750.0 °C	0.1 °C	0.5 °C	Accuracy	±0.01% of Reading ± 1 count
N	-200.0 to 1300.0 °C	0.1 °C	0.3 °C	Supported Units	Hz, kHz, cph, cpm, sec., msec., usec.
mV	-10.000 to 80.000 mV	0.001 mV	±0.02% of reading ± 4uV		
	-10.00 to 250.00 mV	0.01mV	±0.02% of reading ± 0.02mV		
Note: Temperature standard ITS-90					
Measurement & Simulation Range					
Parameters		Range	Resolution	Accuracy	
Resistance (Ohms)		0 to 400 Ω	0.01Ω	4 wire measurement ±0.02% of reading ±0.01Ω Simulation: ±0.02% of reading ±0.02Ω	
		400 to 4000Ω*	0.1Ω	4 Wire measurement: ±0.02% of reading ±0.1Ω, Simulation: ±0.02% of reading ±0.15Ω	
Pt10 to Pt1000		-200 to 200 °C	Pt10 to Pt400: 0.01°C Pt500, Pt1000: 0.1°C	4 wire measurement: ±0.15 °C Simulation*: ±0.15 °C	
		200 to 600 °C		4 wire measurement: ±0.2 °C Simulation*: ±0.25 °C	
		600 to 850 °C		4 wire measurement: ±0.3 °C Simulation*: ±0.35 °C	
Ni100		-60 to 180 °C	0.01 °C	4 wire measurement: ±0.1 °C	
Ni120		-80 to 260 °C	0.01 °C	Simulation* : ±0.15 °C	
Cu10 to Cu100		-200 to 260 °C	0.01 °C	4 wire measurement: ±0.2 °C Simulation*: ±0.8°C	
General Specifications				Power Supply	
Supported Units for RTD/ TC Type		°C/ °F/ °K		Battery Type	Rechargeable Li-ion battery pack, 3000mAh 3.7V
RTD Measurement Current		300 uA		Charging Time	<5 hours max.
Maximum Resistance Excitation Current (Simulation-resistance/ RTD Mode)		3 mA (0...650 Ω measure/source with I exec 2.0V/ rsim (650....4000Ω))		Charger Supply	100-240 VAC, 50/60 Hz; Output 5V DC@1A
Settling Time (Pulsed Currents RTD Simulation)		>1 ms		Battery Life on Full Charge	>17 hours for RTD/Q/TC/V/mV measure/source with minimum backlight. >9 hours for mA generation with minimum backlight. (24VDC @12mA)
CJC Error (For Thermocouple) Internal Reference Junction)		±± 0.5 °C		Display & Keys	
CJC Selection		Manual/ internal/ external*		Display	3.2" TFT LCD, 262K color, graphical, 48.6 mm x 64.8 mm, 240x320 pixels, white LED backlight
Temperature Coefficient		≤30 ppm		Keys	9 Membrane keys
Input Impedance		TC/ mV/ V/ frequency/ pulse >1MΩ mA =10 Ω		Special Features	
Response Time		Input <100ms, output <100ms		Loop Power Output	24V DC, ±10% (24mA maximum)
Load Impedance		>4.7KΩ for TC/mV/V/pulse/frequency O/P <750Ω for mA O/P		HART mA Loop Resistor	250 Ω ± 20%
Isolation		500VDC between measure section & source/ measure section		Automatic Wire Detection	Automatic detection RTD measure wire connection. (2-wire, 3-wire or 4-wire)
Data Logging		Logged data is stored in a user defined file in internal memory Periodic logging: 150000 readings max.		Switch Test	<ul style="list-style-type: none">Potential free contacts Trigger level : 24V, 24mA (2V)Voltage level detection Trigger level : 0 to 30V in 1V steps
Communication Interface		USB 2.0			


APPLICATIONS

- Calibrating and checking temperature indicators & controllers, recorders, temperature transmitters, signal conditioners, etc.
- Laboratory and site calibration purpose of process instruments
- DRIFT test of transmitters and transducers
- Simulation of resistance for position indicators
- As a sourcing device for mV signals for load cell amplifiers
- Check flow measurement instruments vide frequency/ pulse parameters

UC12 AS MULTIFUNCTION CALIBRATOR

Calibrate Pressure Transmitter using UC12

This calibration kit is designed to make multifunction calibration, pneumatic testing, and calibration of mechanical and electronic pressure measuring instruments for a fast and reliable process. This is a cost effective, high-quality, handy, and robust kit which is essential for those who need to perform service and maintenance on pressure & electrical instruments.

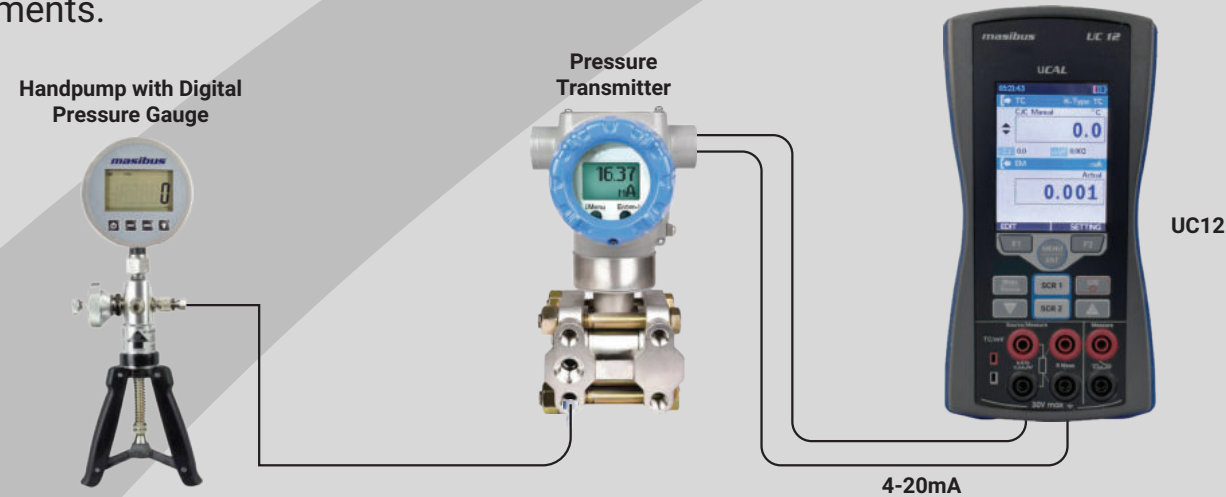

The kit includes a pneumatic hand test pump, which allows you to generate a defined test pressure, and a highly accurate digital pressure gauge that serves as a reference instrument and process calibrator for measurement and calibration of process parameters. All the components of the kit are carefully stored in the case, providing protection during transport. The case is compact and easy to carry, making it convenient to take with you wherever you need to go.


Special Features

- Economical and simple operation for multifunction calibration
- Testing and adjustment of pressure gauges, pressure sensors, pressure switches, safety valves and electrical parameters
- Pressure accuracy with 0.05 % & 0.025% FS
- Pneumatic version from vacuum to 40 bar
- Hydraulic version from 0 to 700 bar



HART calibration using UC12

HART Communicator is a device used in the process control industry to configure, monitor, and diagnose field instruments. With a HART Communicator that includes a UC12 process calibrator option, users can calibrate and verify their field instruments quickly and easily, without the need for additional tools.

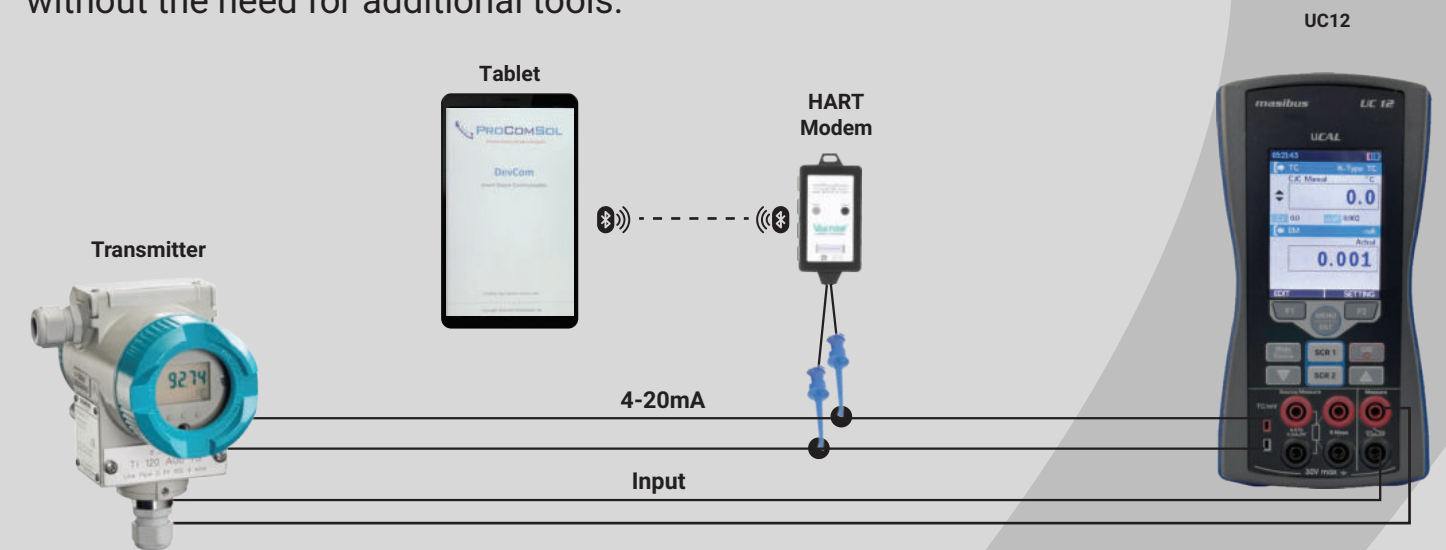

The process calibrator option allows users to apply a known input signal to the instrument and compare its output to the expected value. This enables accurate calibration and verification of the instrument's accuracy.

In addition, a HART Communicator with a process calibrator option typically includes additional features such as measurement and simulation of electrical signals, allowing users to test and diagnose a wider range of instruments.

Special Features

- Full HART Device Description (DD) support of all HART devices with process calibrator
- Perform HART trim on HART devices
- Convenient wireless connectivity to HART modem
- Easy to use, fast connect and view HART data
- Connectivity through bluetooth and USB
- Use mobile and laptop HART communicator



masibus®

A Sonepar Company

iCAL

LC12

The Ultimate Loop Calibrator



It is designed to provide base accuracy of 0.02% of reading in all modes of operation.

2W simulator transmitter, mA simulator, voltage simulator and read/ power are unique features for loop testing

It has automatic switch test feature.

Shortcut keys to operate easily for input selection for measure and source/ measure respectively.

Comes with a mini USB connector for charging, logged data retrieval and firmware upgrade.

Automatic step/ ramp output with auto/ man selection, data logging, max./ min./ average values, scaling to engineering units & filter settings enhances the use of LC 12.

Standard accessories provided patch cables, charger, USB cable, instruction manual, logged data retrieval software CD and calibration certificate, all in an attractive carrying case.

TECHNICAL SPECIFICATIONS

Measurement Range				Power supply	
Parameter	Range	Resolution	Accuracy	Battery Type	Rechargeable Li-ion battery pack, 2300mAh 3.7V
mV	0-250.00 mV	0.01 mV	±0.02% of reading ± 2 counts	Charging Time	<5 hours max.
V	0-30.000 VDC	0.001 V	±0.02% of reading ± 2 counts	Charger Supply	100-240 VAC, 50/60 Hz; Output 5V DC@1A
mA	0-24.000 mA	0.001 mA	±0.02% of reading ± 2 counts		Battery Life on Full Charge
Source Range				Battery Status Indication	Battery symbol displayed with % power remaining
Parameter	Range	Resolution	Accuracy	Physical	
mV	0-250.00 mV	0.01 mV	±0.02% of reading± 2 counts	Dimensions (in mm)	161.7 (L) x 82.1 (W) x 39.5 (H)
V	0-12.000 VDC	0.001 V	±0.02% of reading ± 2 counts	Housing Material	ABS plastic
mA	0-24.000 mA	0.001 mA	±0.02% of reading ± 2 counts	Electrical Terminals	Four nos., 2 mm safety sockets
General Specifications				Weight	<300 grams
Display Mode		Measure + Source, Measure only, Source only, Switch test + Source			
Max. Input Voltage		30 ppm			
Input Impedance Measure		V, mV >1MΩ mA =10 Ω			
Response Time		Input <100ms Output <100ms			
Load Impedance		>10 KΩ for mV/V <750 Ω for mA			
Display Update Rate		10 readings / sec.			
Isolation		500VDC between measure & source			
Data logging		Logged data is stored in a user defined file in internal memory Periodic logging: 150000 readings max.			
Communication Interface		USB 2.0			
Display and Keys				Storage Temperature	-20° to 60 °C
Display		2.4" TFT LCD, 262K Color, Graphical, 42.72 mm x 60.26 mm, 240x320 pixels, White LED backlight			
Keys		6 Membrane keys			
Special Features				Relative Humidity	30% to 90% non-condensing
Loop Power Output		24V DC, ±10% (24mA maximum)			
HART mA Loop Resistor		250 Ω ±20%			
Special Function		Step/Ramp functions: Automatic/manual, √x, x ² for measure & source			
Switch Test		<ul style="list-style-type: none">Potential free contacts Trigger level : 24V, 24mA (2V)Voltage level detection Trigger level : 0 to 30V in 1V steps Input impedance : >1 MΩ			
				Accessories	
				Calibration Certificate	
				User guide	
				2 Sets of 2mm to 2mm Banana Cable	
				2 Sets of 2mm Crocodile Cable	
				2 Sets of connecting plug 4mm to 2mm	
				USB A Male to USB mini B Male Cable for PC Communication and Charging	
				5 VDC Charging Adapter	
				Carrying Bag	
				Data Logging Software CD-mCAL	
				Directive Conformity*	
				Electromagnetic Compatibility Directive 2014/30/EU	EN 61326-1:2013
				Low Voltage Directive 2014/68/EU	EN 61010-1:2010
				*(Applicable only for CE marked)	

APPLICATIONS

- Loop check and calibration
- Calibration of transmitters and transducers
- Switch test and calibration
- Drift test of transmitters and transducers

masibus®

A Sonepar Company

iCAL

LC11

The Ultimate Loop Calibrator



It has either measure only or source only feature, designed to provide base accuracy of 0.02% of reading

2W simulator transmitter, mA simulator, voltage simulator and read/ power are unique features for loop testing

Designed to give maximum battery life in one full charge, the backlight is adjustable for power saving.

Shortcut keys to operate easily for input selection for measure and source/ measure respectively.

Comes with a mini USB connector for charging, logged data retrieval and firmware upgrade.

It is used as a current loop calibrator, digital loop calibrator, current & voltage calibrator, current source, voltage source, current measure, voltage measure.

It is the precision current & voltage calibrator for sourcing or measuring & simulating loop current, mV & V. It is compact & easy to use hand held calibrator with graphical user interface.

TECHNICAL SPECIFICATIONS

Measurement Range				Power supply	
Parameter	Range	Resolution	Accuracy	Battery Type	Rechargeable Li-ion battery pack, 2300mAh 3.7V
mV	0-250.00 mV	0.01 mV	±0.02% of reading ± 2 counts	Charging Time	<5 hours max.
V	0-30.000 VDC	0.001 V	±0.02% of reading ± 2 counts	Charger Supply	100-240 VAC, 50/60 Hz; Output 5V DC@1A
mA	0-24.000 mA	0.001 mA	±0.02% of reading ± 2 counts		
Source Range				Battery Life on Full Charge	>20 hours max. for mA, mV, V measurement with minimum backlight brightness. > 10 hours max. for 12mA generation with minimum backlight brightness
Parameter	Range	Resolution	Accuracy		
mV	0-250.00 mV	0.01 mV	±0.02% of reading ± 2 counts		
V	0-12.000 VDC	0.001 V	±0.02% of reading ± 2 counts	Battery Status Indication	Battery symbol displayed with % power remaining
mA	0-24.000 mA	0.001 mA	±0.02% of reading ± 2 counts		
General Specifications				Physical	
Display Mode		Measure only or source only			
Max. Input Voltage		30 V DC			
Temperature Coefficient		30 ppm			
Input Impedance Measure		V, mV >1MΩ mA =10 Ω			
Response Time		Input <100ms Output <100ms			
Load Impedance		>10 KΩ for mV/V <750 Ω for mA			
Display Update Rate		10 readings / sec.			
Data logging		Logged data is stored in a user defined file in internal memory Periodic logging: 150000 readings max.			
Communication Interface		USB 2.0			
Display and Keys				Environmental	
Display		2.4" TFT LCD, 262K Color, Graphical, 42.72 mm x 60.26 mm, 240x320 pixels, White LED backlight			
Keys		6 Membrane keys			
Special Features				Accessories	
Loop Power Output		24V DC, ±10% (24mA maximum)			
HART mA Loop Resistor		250 Ω ±20%			
Special Function		Step/Ramp functions: Automatic/Manual, \sqrt{x} , x^2 : for measure & source			
				Calibration Certificate	
				User Guide	
				1 Set of 2mm to 2mm Banana Cable	
				1 Set of 2mm Crocodile Cable	
				2 Sets of connecting plug 4mm to 2mm	
				USB A Male to USB mini B Male cable for PC Communication and Charging	
				5 VDC Charging Adapter	
				Carrying Bag	
				Data Logging Software CD-mCAL	

APPLICATIONS

- Loop check and calibration
- Calibration of transmitters and transducers
- Switch test and calibration
- Drift test of transmitters and transducers

masibus

A Sonepar Company

RS-12 Pt100 - Simulator



High precision simulator for the simulation of Pt100 resistance thermometers.

RS-12 covers general operating range of Pt100 with 12 calibration points.

Small in size, rugged and easy to use and it has been specially designed for field use.

It is used wherever measuring instruments or controlling systems have to be tested or calibrated with great precision.

The resistance values required for simulation are directly set in °C.

Accuracy of $< 0.3\text{ }^{\circ}\text{C}$, quick check switch box and allows 2, 3 or 4 wire connections.


The output is a purely passive resistance, it can operate with all types of Pt100 measuring equipments, including the live systems using pulsed, or interrupted excitation current.

TECHNICAL SPECIFICATIONS

Specification		Table-1 (ITS 90)			
Temperature Range		Adjustable Temperature Values			
Accuracy	$< 0.3\text{ }^{\circ}\text{C}$	-150°C	- 50°C	0°C	50°C
Temperature Coefficient	20 ppm / °C	100°C	200°C	300°C	400°C
Allowable Excitation Current	0 to 15 milliamps steady or intermittent	500°C	600°C	700°C	800°C
Physical					
Dimension (in mm)	50 (H) x135.4 (W) x 66.5(D)				
Enclosure Material	Extruded aluminum				
Protection	IP40				
Weight	<400 grams				
Terminals	4 nos, 4mm safety sockets				
Environment					
Operating Temperature	0 to 55 °C				
Storage Temperature	-20 to 70 °C				
Humidity	30 to 90 % RH				

Connection Details

Example of application: Calibration of a controller

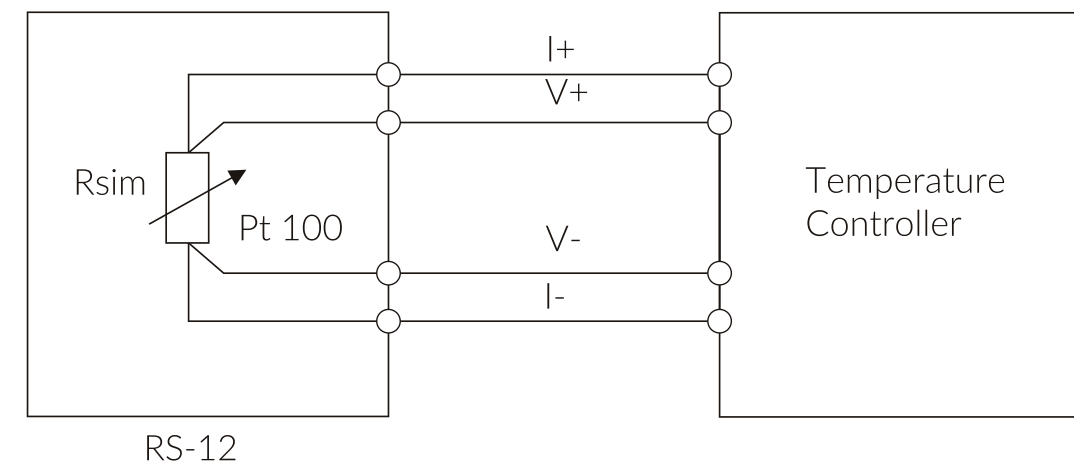

Ordering Code

Model
RS-12

- Comes with factory calibration certificate along with supply (Traceable to national/ International standard)
- Calibration certificate from NABL certified Lab (ISO: 17025) can be provided upon request - Please contact factory

Accessories (Standard)

- Patch cords RED (1 end crocodile pin other end 4mm pin) - 2 nos.
- Patch cords BLACK (1 end crocodile pin other end 4mm pin) - 2 nos.
- Patch cords (PC-3 RED) (Both end 4mm pin) - 2 nos.
- Patch cords (PC-3 BLACK) (Both end 4mm pin) - 2 nos.

APPLICATIONS

- To simulate RTD signal in all types of instruments, such as transmitters, controllers and data acquisition, process control, lab equipment etc.
- To simulate RTD signal in automation (PLC, DCS), data acquisition panels
- For maintenance & trouble shooting

CALIBRATION TRAINING FOR THE PROFESSIONAL

We provide customized Workshop and Training on Calibration for
Industrial Professionals (Technicians and Engineers)

Masibus Calibration Training/Workshop is Structured to Enhance your
Engineering Expertise and will Include:-

- ON Site & OFF Site Calibration Workshop, Online Training for Professional Outside India
- General Calibration Measurement and Understanding of Calibration Terms
- Training on Measurement of Temperature and Pressure Parameters
- Hands-On Supervised Training with ISO 9001:2015 Calibration Requirement
- Training Certificate after the Workshop is Completed



Multi Function
Test Bench



Pressure
Test Bench



Temperature
Test Bench



Electrical
Test Bench

BENEFIT TO OUR CUSTOMERS

Low cost world class loop
calibrator, RT and TC calibrators

Strong R&D team for high class
product development & upgrade

Recalibration services

Excellent track record in the
field of calibration in India

Turnkey customized modular application base solution of test benches
for electrical, pressure, temperature and multifunction

20+ years of core expertise
in calibration industry

Advanced high end process
calibrators with high accuracy

Calibration training service for
instrument professionals

Excellent sales & service support

Calibration Test Bench Offerings

Calibration Test Benches are workstations for the maintenance and calibration of process instruments. Masibus Test Bench configurations are developed with intelligence of versatile & modular design, keeping in mind the instrument testing & calibration procedures.

The modular concept gives it the ease and makes it possible for a wide range of configurations & performance capabilities. All calibration benches are custom-built and engineered, meeting industry applications & standards of maintenance & calibrations of various devices used in the plant. It helps industry to maintain calibration data & healthiness of all field devices to give optimum performance.

Key Differentiators

Made of heavy grade, high quality CRCA and aluminium fabrications	Load capacity: 200kg modular design, easy change of arrangement	Flexible maintenance - Device modular structure
Complete aluminium profile based option availability	Proper electrical earthing provided on test bench	Documenting version available with PC connectivity
Accurately fabricated, welded & powder coated structure	Manual/ automatic pressure & temperature calibration choice	Options for HART, PA, FF communication available
Smooth surface & ultra simple to clean	Superior quality & sleek look	Table top: Laminated chip board of 25 mm thickness

Types of Test Bench



Multi Function Test Bench

- Calibration facility for pressure, temperature & electrical instruments
- Flexible maintenance - Device modules structure
- Option for (HART, PA, FF) communication
- Documenting version available with PC connectivity



Pressure Test Bench

- Highly accurate pressure calibration for range from vacuum to high pressure upto 1000 bar
- Manual/ automatic pressure calibration choice
- Pneumatic or hydraulic versions
- Precise pressure controller source from vacuum to 210 bar



Temperature Test Bench

- Manual/ fully automatic temperature calibration choice
- Provision of inserts of standard and customized size of holes for temperature dry blocks
- Option for (HART, PA, FF) communication



Electrical Test Bench

- ESD protection enables safe handling of delicate components
- Isolation transformers, fault current & overload protections & emergency stop switch

Masibus Automation And Instrumentation Pvt. Ltd.

Gandhinagar

Address: B-30, G.I.D.C. Electronic Estate,
Sector - 25, Gandhinagar - 382 024,
Gujarat, India
E-mail: sales@masibus.com
Ph. No.: +91 9662042824

Goa

Address: C-6, Phase 1-A, Verna Industrial
Estate, Verna, Salcette - 403722,
Goa, India
E-mail: sales@masibus.com
Ph. No.: +91 9822135796

Sharjah

Address: A2-102, SAIF Zone, PO Box
120145 Sharjah, UAE
E-mail: sharjahall@masibus.com
Ph. No.: +971 65574650

Bengaluru

E-mail: sales@masibus.com
Ph. No.: +91 8732971943

Chennai

E-mail: sales@masibus.com
Ph. No.: +91 9725154195

Delhi

E-mail: sales@masibus.com
Ph. No.: +91 9909949742

Hyderabad

E-mail: sales@masibus.com
Ph. No.: +91 9909949062

Kolkata

E-mail: sales@masibus.com
Ph. No.: +91 9512003359

Mumbai

E-mail: sales@masibus.com
Ph. No.: +91 9689937234

Pune

E-mail: sales@masibus.com
Ph. No.: +91 9689937234

E-mail: sales@masibus.com
Website: www.masibus.com

Sales Service: TOLL FREE (India)
1-800-233-2273

Sonepar India Pvt. Ltd.

Gurgaon

Address: Plot No. 229/239, Village -
Kherki Daula, Sector 76, Gurugram,
Haryana, 122004, India

Kolkata

Address: 503, Block 4B, Ecospace
Business Park, Newtown, Rajarhat,
Kolkata, West Bengal, 700160, India

Chennai

Address: Plot No. 1, Gokul Garden,
Melnallathur, Thiruvallur, Chennai,
Tamil Nadu, 602002, India

Aurangabad

Address: FP-42, Five Star Industrial Area,
Shendra MIDC, Aurangabad,
Maharashtra, 431201, India

Panchkula

Address: Plot No. 263, Industrial Area,
Phase-II, Panchkula, Haryana,
134113, India

Bhubaneswar

Address: Plot No. 443, 1st Floor,
Saheed Nagar, Bhubaneswar,
Odisha, 751007, India

E-mail: communications@soneparindia.com
Website: www.soneparindia.com