



8208 Universal Scanner

Input Type	Range	Input Type	Range
E	-200 to 1000°C	0 to 75 mV	-1999 to 9999
J	-200 to 1200°C	0 to 100 mV	
K	-200 to 1370°C	0.4 to 2 V	
T	-200 to 400°C	0 to 2 V	
B	450 to 1800°C	0 to 20 mA	
R	0 to 1750°C	4 to 20 mA	
S	0 to 1750°C	0 to 5 V	
N	-200 to 1300°C	1 to 5 V	
RTD(PT100)	-199.9 to 850.0°C	0 to 10 V -10 to 20 mV	

Table 1.1

**SPECIFICATIONS**

<b>ACCURACY TC:</b>	±0.1% of instrument range ±1 digit for temp. ≥0°C OR ±0.25% of instrument range ± 1 digit for temp. <0°C OR ±0.25% of instrument range ± 1 digit(B,R,S TYPE TC)
<b>RTD/LINEAR:</b>	± 0.1% of instrument range ± 1 digit
<b>RESOLUTION TC(E,J,K,T,N)/RTD:</b>	ADC: 17 bits 0.1°C
<b>TC(B,R,S):</b>	1°C
<b>LINEAR:</b>	1 Count
<b>APPLICABLE STANDARD</b>	DIN (ITS-90) for TC & RTD
<b>INPUT TYPE</b>	Refer table 1.1
<b>SAMPLING PERIOD PER INPUT</b>	100 ms for TC and Linear Input and 200 ms for RTD
<b>BURNOUT DETECTION</b>	For TC, RTD, linear input signal. It detects whether sensor is connected or not
<b>MEASUREMENT CURRENT(RTD)</b>	1 mA
<b>INPUT IMPEDANCE</b>	>1 MΩ for TC/RTD/Linear input & 100 ohms for mA input
<b>NMRR</b>	> 40 dB (50/60 Hz)
<b>CMRR</b>	>120 dB (50/60 Hz)
<b>ALLOWABLE WIRING RESISTANCE FOR RTD</b>	Maximum 15 Ω/wire (Conductor resistance between three wires should be equal).

**Retransmission Output (Optional)**

<b>NUMBER OF OUTPUTS</b>	1
<b>OUTPUT SIGNALS</b>	0-20mA, 4-20mA, 0-5V, 1-5V or 0-10V DC
<b>LOAD RESISTANCE</b>	≤500 ohms for current o/p ≥3K ohms for voltage o/p
<b>OUTPUT ACCURACY</b>	±0.25% of span

**Relay Contact Outputs**

<b>NUMBER OF OUTPUTS</b>	4
<b>OUTPUT SIGNAL</b>	Two terminals (NC/NO and C)
<b>RELAY CONTACT RATING</b>	250 VAC / 30 VDC @ 2A
<b>OPERATING / RELEASE TIME</b>	<10 ms

**Communication Specification**

<b>COMMUNICATION TYPE</b>	Half duplex/Asynchronous
<b>COMMUNICATION PROTOCOL</b>	MODBUS RTU. All parameters are Configurable through MODBUS Protocol.
<b>MAXIMUM NO. OF UNITS</b>	32
<b>COMMUN. ERROR DETECTION</b>	CRC Check

**Display Specification**

<b>PV DISPLAY</b>	4-digits, 7-segment, Red LEDs, 0.56" character height
<b>CHANNEL NO. DISPLAY</b>	2-digits, 7-segment, Green LEDs, 0.56" character height
<b>RELAY GROUP DISPLAY</b>	1-digits, 7-segment, Red LEDs, 0.56" character height
<b>STATUS INDICATING LEDs</b>	16-Red LEDs for Alarm status, 4-Red LEDs for Relay status, 1-Red LED for Manual mode status, 1-Red LED for Fault status, 2-Green LEDs for Communication

**Power Supply Specification**

<b>RATED VOLTAGE</b>	85-260 VAC-50/60Hz 100-300 VDC or 18-36 VDC
<b>POWER CONSUMPTION</b>	Max. 15 VA
<b>DATA BACKUP</b>	Non-volatile memory

**Isolations (Withstanding Voltage)**

- Between primary terminals\* and secondary terminals\*\*: 1500VAC for 1 minute
- Between secondary terminals: 500V AC for 1 minute
- \* Primary terminals indicate power terminals and relay output terminals
- \*\* Secondary terminals indicate analog input signals, Digital Contact output terminals, communication terminals and Ethernet N/W terminal

**Insulation Resistance:** 20M or more at 500 V DC

**Signal Isolation Specifications**

Signals	Signal Isolation
<b>PV Input Terminals</b>	Isolated from other input/output terminals.
<b>Retransmission Output terminals</b>	Not isolated from current or voltage outputs but Isolated from other input/output terminals and internal circuit.
<b>RS-485 Communication</b>	Isolated from other input/output terminals and internal circuit
<b>Relay contacts Control output Terminals</b>	Isolated between contact output terminals and from other Input/output terminals and internal circuit.
<b>Power Terminals</b>	Isolated from other input/output terminals and internal circuit


**Environmental Specification**

<b>AMBIENT TEMPERATURE</b>	0 to 55°C
<b>HUMIDITY</b>	30% to 95% RH (Non-Condensing)
<b>TEMPERATURE COEFFICIENT</b>	• For Data < 100ppm • For Retransmission < 150ppm
<b>INSTRUMENT WARM-UP TIME</b>	>30 mins after power on

**Construction, Installation, and Wiring Specification**

<b>MATERIAL</b>	ABS resin and Polycarbonate
<b>CONSTRUCTION</b>	Only the front panel is dust-proof
<b>CASE COLOR</b>	Black
<b>WEIGHT</b>	< 0.5 kg
<b>DIMENSIONS</b>	96 (W) x 96 (H) x 110 (depth from panel face) mm
<b>PANEL CUTOUT</b>	92.5 + 0.8(W) x 92.5 + 0.8(H) mm
<b>INSTALLATION</b>	Panel-mounting type


**MOUNTING DETAILS**

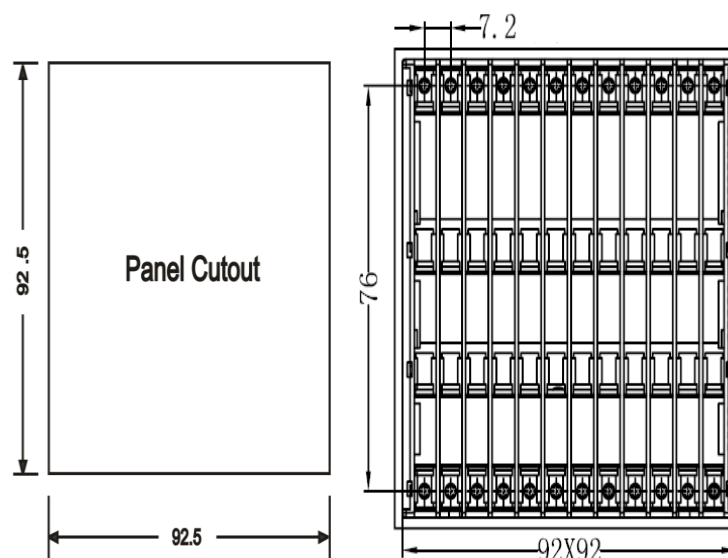

**FRONT PANEL DESCRIPTION**

Name of Part	Function
	It is used to enter in the sub menu (various levels) and save the parameters to non-volatile memory
	It is used to come out from any sub menu (various levels) to the run mode. It is used for come out of the manual mode to auto mode too
	It is used to increment the parameter for selection.
	It is used to Shift the digit to set the parameter or decrement the parameter
	It is used to switch between auto to manual mode and manual to auto mode. During manual mode Increment key is used to change channel number
<b>DATA</b>	Displays Process Value. Display Parameter Name When You Set Parameter. Displays Error Message When An Error Occurs.
<b>CHANNEL</b>	Displays Channel Number in run mode. Also it will display relay number (01 - 04) in set mode
<b>GROUP</b>	Displays Group Number for Relay Mapping
<b>RL1, RL2, RL3, RL4</b>	When Respective Relay LED Lits (In Red)
<b>AL1</b>	When Alarm1 Occurs, Respective Alarm LED for Channel-1 to 8 will Lit (In Red).
<b>AL2</b>	When Alarm2 Occurs, Respective Alarm LED for Channel-1 to 8 will Lit (In Red).
<b>MAN</b>	If LED is on, it indicates Manual mode and if LED is off Auto Mode.
<b>T1,R1 &amp; T2,R2</b>	When Communication on, two LEDs blink.

**BACK PLATE CONNECTION DETAIL**

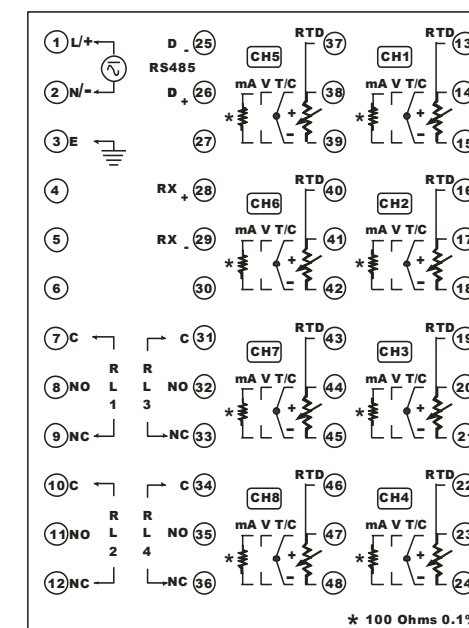

**RELAY OUTPUTS**

Following function can be set for Relay outputs

**Relay Function:** Relay function can be selected as ALARM or TRIP.

- If relay is selected as ALARM, when abnormal condition occur Relay will ON, once normal condition after abnormal condition occur Relay will OFF.
- If relay is selected as TRIP, when abnormal condition occur Relay will ON, once normal condition after abnormal condition occur Relay will ON. Relay will be off through Acknowledge.

**Relay Delay:** A time delay can be provided for the actual output.

**Relay Open Sensor:** Open sensor up scale or down scale can be selected for each relay output.

**Relay Mapping:** Refer Menu layout LEVEL - 2

**Relay Types:** Various relay operations are shown in the reference figure. (High, Low, Very High- High, Low-Very Low, High- Low)  
For relay types selection Refer Menu layout LEVEL-2

dP (dP)	Decimal Point Setting	0 to 3(1 - 8 Channel)	0
rL.LG (rL.LG)	Relay Logic	Normal / Fail Safe	Normal
rL.Fn (rL.Fn)	Relay Function	0:ALARM 1:TRIP	Alarm
rL.dL (rL.dL)	Relay Delay	1 to 99 seconds	1 second
rL.oS (rL.o.S)	Relay Open sensor	0:DOWN 1:UP	Up Scale
rL.mP (rL.mP)	Relay mapping	Relay Configuration	-
rL.tP (rL.tP)	Relay Group Type	Relay Configuration	-

**Level-3:**

Parameter		Setting name and description	Default value
Symbol	Name		
pwd (PWD)	Level-3 Password	0 to 9999	0000
Skip (skip)	Channel skip/Unskip selection.	YES / NO 0:NO 1:YES	0(for all 8 channel)
RI.IH (rL.LH)	Relay Latch	ON / OFF 0:OFF 1:ON	0
RI.Gp (rL.GP)	Relay Group	0:Relay Group-4 1:Relay Group-2	1
SCAN (SCAN)	Scan Time	1 to 250 seconds	1
A.CJC (A.CJC)	Auto cold junction(Only applicable for TC input type	YES / NO 0:NO 1:YES	1
F.CJC (F.CJC)	Fix cold junction(Only applicable for TC input type	0.0 to 60.0 Deg C	0.0 Deg C
Sr.no (Sr.no)	Unit ID	1 to 247	1
BAUd (baud)	Communication Baud rate	9600 / 19200 0:(9600) - 9600 bps 1:(19.2K) - 19.2 Kbps	19.2k bps

Pr.St (Pr.St)	Parity/Stop bit selection	0:(P.N.S.1)-parity none-stop bit-1 1:(P.N.S.2)-parity none-stop bit-2 2:(P.O.S.1)-parity odd-stop bit-1 3:(P.E.S.1)-parity even-stop bit-1	No parity /Stop bit - 2
T.out (t.out)	Timeout for display back to Run Mode	10 to 100 Seconds	60
RT.o.S (rt.o.s)	Retrasmission Open sensor	0:DOWN 1:UP	1
Rt.tp (rt.tp)	Retrasmission Output Type	0-20/4-20/ 0-5u/ 1-5u/ 0-10u 0:(0-20) - 0-20mA 1:(4-20) - 4-20mA 2:(0 - 5) - 0 - 5volt 3:(1 - 5) - 1 - 5volt 4:(0 - 10) - 0 - 10volt	1
Rt.dr (rt.dr)	Retrasmission direction	dir / rev 1:(dir) 0:(rev)	1
Rt.CH (rt.CH)	Retrasmission Channel	1 to 8 channel	1
Rt.rd (rt.rd)	Retrasmission Channel Value	Max / Min 1:(Max) 0:(Min)	1
S.Pwd (S.PWD)	Password Set password to lock selected level	0 to 9999	0

**Calibration:**

Parameter		Setting name and description	Default value
Symbol	Name		
pwd (PWD)	Password	0 to 9999	0000
amb (Amb)	Ambient	Ambient adjustment	-
CAL.Z (CAL.Z)	Thermocouple, Rtd and Linear Zero Calibration	Depending on PV sensor type selected	-

CAL.S (CAL.S)	Thermocouple, Rtd and Linear Span Calibration	Depending on PV sensor type selected	-
Rtr.Z (rtr.Z)	Retrasmission voltage and current Zero calibration	Depending on Retrasmission type selected	-
Rtr.S (rtr.S)	Retrasmission voltage and current Span calibration	Depending on Retrasmission type selected	-

**Factory Reset Parameters:**

Parameter		Setting name and description
Symbol	Name	
Pwd (PwD)	Password	0 to 9999
L.def (L.dEF)	LOAD Default	CAL\PARA\ ALL (CAL)\(PARA)\(ALL) <b>CAL-</b> Only calibration set to default value <b>PARA-</b> All parameters excluding calibration will set to default value <b>ALL-</b> Calibration and parameters will set to default value

**MENU LAYOUT**

**Level-1:**

Parameter		Setting name and description	Default value
Symbol	Name		
Pwd (PWD)	Level-1 Password	0 to 9999	0000
SP.1 (SP.1)	Target Set point-1	SetPoint-1 for Channel 1 to 8.	0100 (for all 8 channels)
SP.2* (SP.2)	Target Set point-2	SetPoint-2 for Channel 1 to 8.	0200 (for all 8 channels)
HYS (HYS)	Hysteresis	Hysteresis for Channel 1 to 4.	0002 (for all 8 channels)

\* Shows only if Relay group 2 is selected

**Level-2:**

Parameter		Setting name and description	Default value
Symbol	Name		
Pwd (PWD)	Level-2 Password	0 to 9999	0000
inPt (inP.t)	PV Input Type	Input type for 1-8 channel	K-TC
PV.HI (PV.HI)	Process value range high setting	Range of the sensor /-1999 to 9999 (for linear input types)(1-8 Channel)	1370
PV.LO (PV.LO)	Process value range lower setting	Range of the sensor /-1999 to 9999 (for linear input types)(1-8 Channel)	-200