



MC-1-U GPS Master Clock

Accurate. Reliable. Compact.

Masibus MC-1-U GPS Master Clock has been developed for the power and process industry time synchronization requirements. It is the most featured and cost-effective GPS time synchronization solution available in 1U compact size. MC-1-U is Reliable and provides time accuracy of 150nsec at basic level.

MC-1-U generates wide range of time code and pulse signals via different output ports like RS232 serial, PPS, IRIG-B, Ethernet and PFC relay. These outputs have ample drive capability to drive multiple loads in parallel and its parameters are fully configurable. The GPS receiver has built-in RTC backed up with on board battery to maintain time during power loss and instant recovery on power resumption.

MC-1-U has a front panel display and keypad for configuration and viewing of time parameters and output ports, discrete LEDs provide at-a-glance status and health information. MC-1-U is also programmable via hyper terminal on the serial port, Ethernet parameters like IP gateway and subnet mask are programmable via the Ethernet port using Telnet, for more than one Ethernet port each port is individually programmable for IP and subnet.

Masibus has four decades of design experience and have supplied hundreds of GPS clocks for the most demanding applications in the power and process industry, Masibus clocks have been successfully interfaced with all types of devices like DFR, SOE, Relays, PLC, DCS, IEDs, servers and many more.

Features

- Reliable and cost effective
- 8 time-formats over 7 output ports
- 12 Satellite parallel tracking
- Universal (AC/DC) Power Supply
- Highly accurate TCXO type crystal (OCXO Optional)
- 2x20 Character backlit LCD display
- Supports synchronization of IEC61850 compliant devices via NTP/SNTP protocol
- Programmable Pulse Output
- Solid State relays for programmable events
- All weather water proof antenna
- Synchronization software for Server & Client
- Diagnostic Relay outputs
- Supporting Protocols:
 - NMEA-0183 (RMC)
 - NGTS & T-FORMAT
 - IRIG-B Modulated
 - IRIG-B TTL
 - SNTP/NTP (RJ45)

Applications: Time synchronization of

- Sequence of event recorders
- Disturbance recorders
- Numerical relays
- UNIX, Linux & Windows servers
- Slave clocks
- PLC/DCS/SCADA
- ABT metering
- EMS system
- Telecommunication
- Synchrophasor measurement
- Fault locator

TECHNICAL SPECIFICATIONS

GPS Receiver

Timing Accuracy	< 15 ns with GPS Receiver (Receiver is locked on fixed position)
Positioning Accuracy	< 10 m
Input Frequency	1575.42 MHz L1 C/A code
Tracking	12 parallel channels
Acquisition time	Hot Start < 5 sec Warm Start < 38 sec Cold Start < 45 sec


Antenna

Type	Active L1. GPS, 30 dB gain
Antenna Cable	RG6 Coaxial cable
Operating Temperature	-40 to +85 °C
Coverage	360 °C
Ingress Protection	IP67
Weight	150 g

Interface and Configuration

Display	2x20 Character backlit LCD Display
Displayed data	Local / UTC time and date
	Day of the week
	Position latitude, longitude
	Status of the GPS receiver
Status LEDs	Current data format of COM2
	Power, 1PPS, Watchdog, Event, GPS Locked
Configuration Programming	Parameters programmable by
	• Keypad
	• Hyper Terminal (Serial RS232)
	• Ethernet Parameters using TELNET (Ethernet RJ45 Port)
Programmable Parameters	• Global time zone correction
	• Hour settings for Display (12 or 24 Hrs)
	• Data format selection (NGTS or T-FORMAT)
	• Repetitive event generation output via Potential free Contact (Per Minute or Hour)
	• Additional Event Configuration (Total & On time of Events)
	• Manual Time setting
Configurable Parameters via TELNET	• Propagation delay correction (compensate for antenna cable length)
	IP, Gateway and Subnet
NTP / SNTP Client Software	• Platform Support: Windows 98/NT/2000/XP/7 server synchronization • NTP Client Software is for easy distribution of time across the network



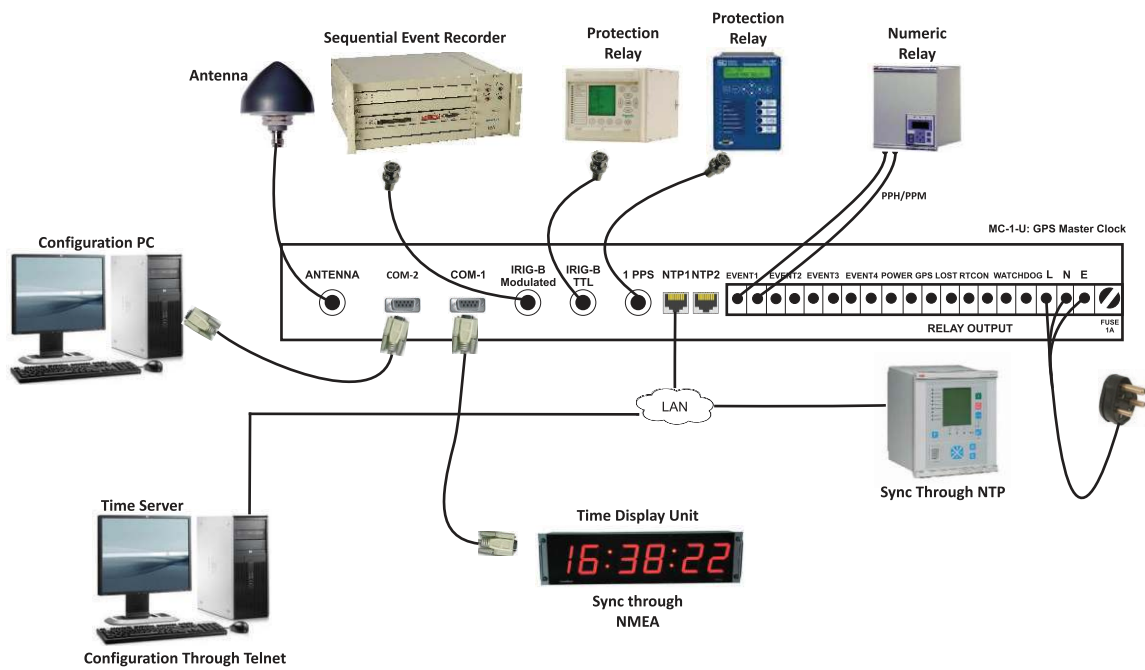

Technical Specifications

Time Signal Output


Output Type	Description	Connector*	Accuracy (to UTC)	Available Output Standard	Options
PPS	<ul style="list-style-type: none">1 Pulse per secondTTL into 250Ω200 ms Pulse Width	BNC Female	±150nSec	1	-
IRIG-B Modulated	<ul style="list-style-type: none">IRIG-B(127) or IEEE 1344/C37.118-2005 (Field Selectable)1 KHz AM Signal3:1 Modulation Ratio3Vp-p into 100Ω ±10%	BNC Female	±10μSec	-	1
IRIG-B TTL	<ul style="list-style-type: none">IRIG-B (007) or IEEE 1344/C37.118-2005 (Field Selectable)TTL into 50Ω	BNC Female	±1.5μSec	1	-
NTP (LAN Interface)	<ul style="list-style-type: none">Protocol Support: NTP V3, SNTP, SNMP V2Network Protocol: TCP, Telnet, UDP, IPv4Mode: ServerNetwork Interface: RJ45, 10/100Mbps	RJ45	±1mSec	-	2
COM-1	<ul style="list-style-type: none">NMEA-GPRMCIsolated Serial RS232 /485**Configuration: 9600-8-N-1	DB9 Female	-	1	-
COM-2	<ul style="list-style-type: none">Selectable between NGTS & T-FormatIsolated Serial RS232/485**Programmable baud rate, stop bit, parity bit and message format	DB9 Female	-	1	-
Event	<ul style="list-style-type: none">PMOS relayRating: 350VDC/120mAOn time programmable	Plug in screw terminals 2.5mm ²	-	1 Selectable PPM or PPH (fix 1 sec On time)	4 (Selectable PPS to PPD)

*For BNC, RJ45 and DB9; 2 meter cable with mating connector supplied as standard
**RS232/485 is site selectable default setting from Factory is RS232

Alarm Output

3 Numbers of PFC
Rating: AC: 230 V @ 2A; DC: 30V @ 2A /110V @ 0.3A/ 220 V @ 0.12 A (max) a) GPS Sync. Lost, b) Watchdog, c) Power Fail

TECHNICAL SPECIFICATIONS

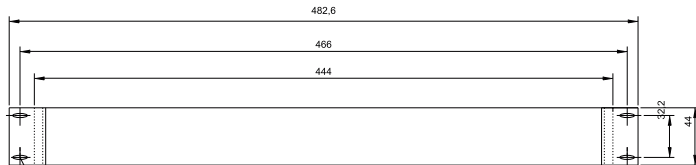Power Supply		Environmental	
Power Supply (Std)	AC: 90-264V, 47 to 63 Hz DC: 125-300V	Operating temperature	0 to +55 °C
Power Supply (Optional)	DC: 18-72V	Storage temperature	-20 to +80 °C
Power Consumption	< 15 W	Humidity	20-90% Non Condensing
Isolation (Withstanding voltage) Between primary terminals* and secondary terminals**: At least 1500 V AC for 1 minute Between primary terminals* and grounding terminal: At least 1500 V AC for 1 minute Between grounding terminal and secondary terminals**: At least 1500 V AC for 1 minute Between secondary terminals**: At least 500 V AC for 1 minute * Primary terminals indicate power terminals and relay output terminals. ** Secondary terminals indicate Output Ports. Insulation resistance: 50MQ or more @ 500 V DC between power terminals and grounding terminal. Note: No Isolation between IRIGB-TTL and PPS Output.		Type test	
		Electrostatic Discharge (ESD)	IEC 61000-4-2
		Radiated Susceptibility	IEC 61000-4-3
		EFT Test	IEC 61000-4-4
		Surge Test	IEC 61000-4-5
		Conducted Susceptibility (Conducted RF)	IEC 61000-4-6
		Power Frequency Magnetic Field	IEC 61000-4-8
		High Frequency Disturbance	IEC 61000-4-10
		Voltage interruption/ voltage dips	IEC 61000-4-11
		Damped Oscillator Magnetic Field	IEC 61000-4-12
		Radiated Emission	As per CISPR-22
		Conducted Emission	
		Vibration	IEC 68-2-6
		Bump Test	IS 9002 Part-7
		Dry Heat Test	IEC 60068-2-2
		Damp Heat Steady State test	IEC 60068-2-30
		Shock Test	IEC 60255-21-2
		Dielectric Test	
		Cold Test	IEC 60068-2-1: 2007
Physical		Accessories (Optional-On Request)	
Mounting	1U, 19" Rack Mount	m-LA-01: Lighting Arrestor (Surge Suppressor)	
Depth (mm)	324	m-AR-01-01: Antenna Rod (1 meter)	
Ingress protection	IP20 enclosure	m-SR-01: RS485 Repeater	
Weight	3 Kg (approx)	TDR-4: Time Distribution Rack	
Panel Cut-out		TSR-4: Time Signal Repeater	
 <p>4 NOS. - THRU SLOTS SIZE- 7.5(W) X 10.4(L) FOR MOUNTINGS.</p>		Netser (NGTS-NTP) Converter	
		TDU-64: Time / Date / Day / Frequency Display	
Standard Accessories			
m-AN-01: Antenna	1 no		
m-MK-AMC-40-1: Antenna Clamp for mounting	1 no		

Model	LAN Output		IRIG B Mod O/P		Event Output		Power Supply		Antenna Cable Length	
MC-1-U	X		X		X		X		X	
	0	None	0	None	0	None	U1	90-264VAC /125-300VDC	0	None
	1	One	1	One	1	4 Event O/P	U2	18-72V DC	1	15 Meter
	2	Two							2	30 Meter
									3	50 Meter
									4	100 Meter
									5	Special