



VMS4SE

Multi-Channel Vibration Monitor

Alarm | Trip | Monitor
Communication | Logging



mVSCAN



The VMS4SE is an upgrade of model VMS4S; additional capabilities have been added by way of no of channels, multi-serial ports, ethernet port, scanning speed and alphanumeric display. VMS4SE accepts input directly from ICP type accelerometer, processes the signal and gives analog output in the form of standard current or voltage to suit different applications in power, cement and metal industries; optionally VMS4SE also accepts universal analog input to serve various application

Modular and Expandable

VMS4SE is modular in architecture and expandable, I/O slots can accommodate a mix of vibration input, analog input, open collector output or relay output. All field inputs are wired by pre-fab cables direct into panel terminals

Configuration

VMS4SE is used for plant wide predictive maintenance. It takes up online vibration and provides data through software. It is configured using the **mVSCAN** software which is very user friendly; the unit can also be edited by front keyboard and display. The unit has numeric and alphanumeric displays for value and tag display, alarm/trip and control status are displayed by discrete LEDs on front fascia.

Communication

VMS4SE comes with one RS-485 port as a standard, a second RS-485 port & an ethernet port are options to enhance the communication capabilities of the unit and for direct interface with PLC, DCS or SCADA

Buffer Output

VMS4SE comes with field interface board with buffered output on BNC connector for analysis purpose of raw signal of vibration input

Alarm/ Control

8 Relay and 16 OC outputs can be freely mapped as alarm/trip or control set point

Analog Output

An optional isolated 4-20mA analog output proportional to vibration range is available to interface with PLC/DCS/RTU for centralized monitoring and protection. Max. 8 output is possible

Features

- 4 / 8 Channel vibration input module
- Optional 8 channel universal analog input module
- 3 I/P & 2 O/P slots capacity
- Compact and rugged panel mount
- Extruded aluminum chassis with IP55 front fascia
- Field configurable for acceleration, velocity or displacement range
- Fast sampling and generation of alarm/trip
- User free mapping of relay to channels
- Comprehensive alarm/trip logic
- Alpha-numeric display for programmable tag no. / Engg unit
- RS-485 serial port (One standard and 2nd optional)
- 1x ethernet port (Optional)
- Analog output (4-20 mA) (Optional)
- Field interface buffer output module
- Modbus RTU over serial and modnet over ethernet protocols
- Windows based free **mVSCAN** configuration software
- Data logging option

Applications

- Balance of plant vibration measurement and protection of
 - Cooling towers
 - Pumps
 - Motors
 - Gear boxes
 - Blowers
 - ID/FD/PA fans
 - Air compressors
 - Conveyors
- Motor/ generator/ turbine monitoring and protection
- Compressor/ pump/ DG set monitoring

USER-FRIENDLY PROGRAMMING AND ONLINE LOGGING

mVSCAN Software

mVSCAN Software is used to Monitor and Configure the Multichannel Vibration Monitor

- Auto device discovery of VMS4SE over RS-485 port
- Run time data monitoring
- Configuration through RS-485 and ethernet port
- Data log retrieval (Periodic and event) in XLS and pdf file formats
- Online data logging in XLSX format
- Report generation
- Alarm/Trip setpoints
- Time stamping



Easy to Monitor

Parameters Front Display mVSCAN Software

Real-time data


- | Parameters | Front Display | mVSCAN Software |
|--|---------------|-----------------|
| • Channel no. | ✓ | ✓ |
| • Process/Parameter value | ✓ | ✓ |
| • Zero/Span, input type | ✓ | ✓ |
| • Alarm status | ✓ | ✓ |
| • Channel wise process/parameter value | ✓ | ✓ |

Programming using mVSCAN Software

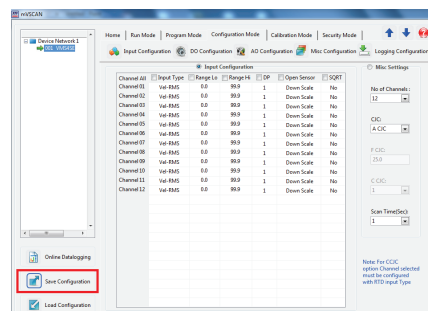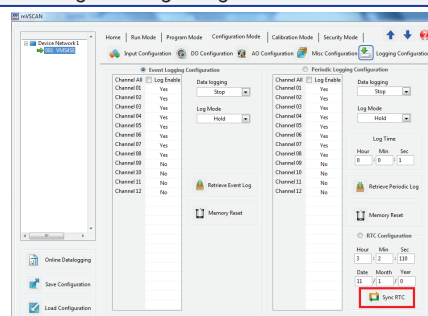


Online Logging using mVSCAN Software

Application

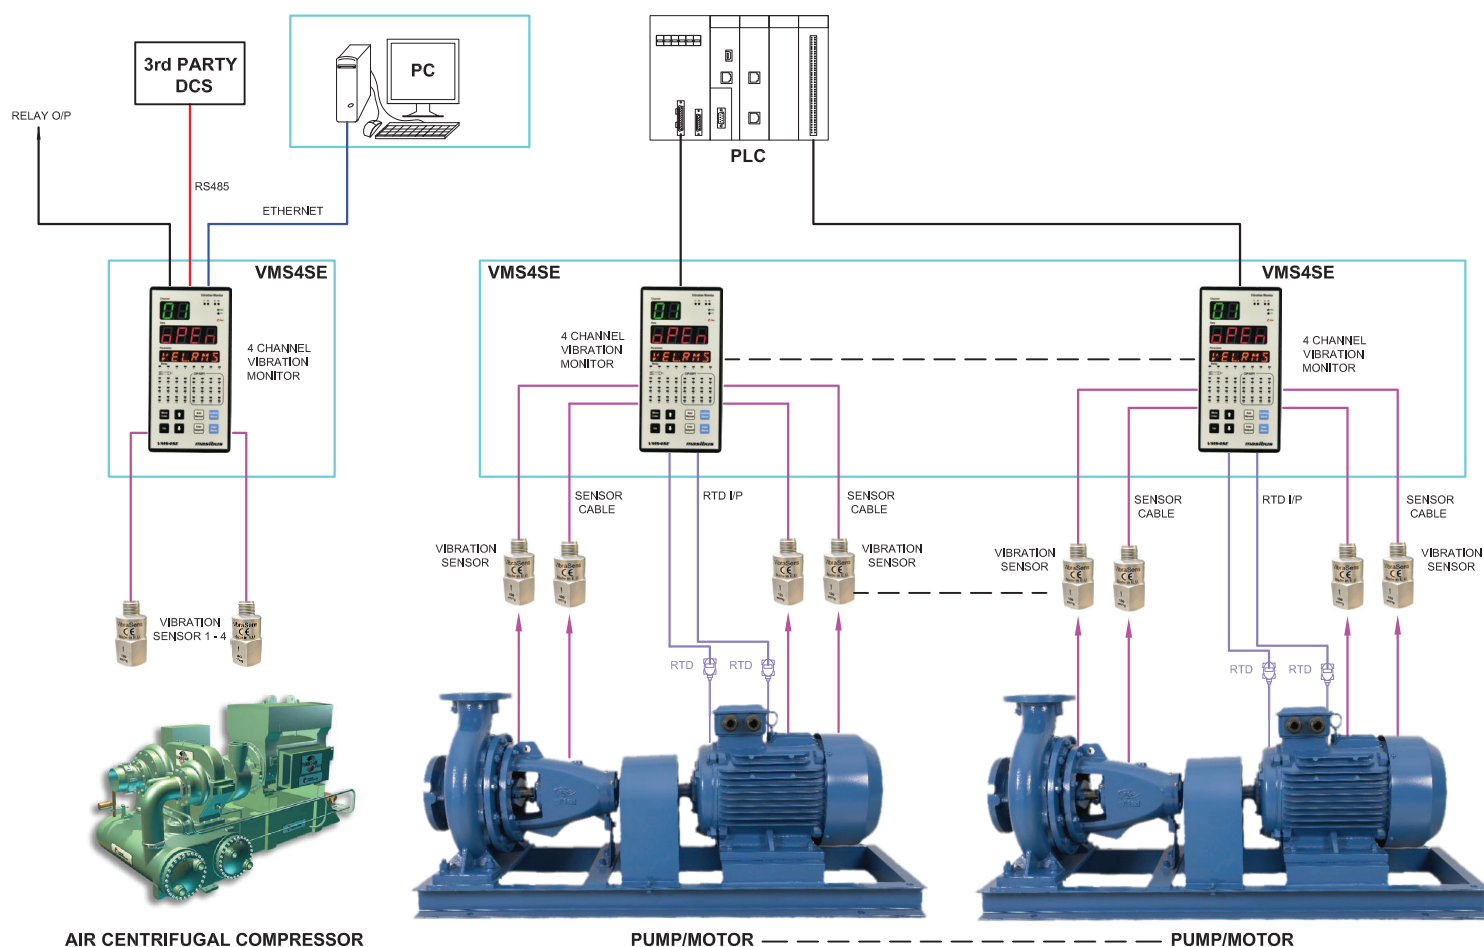


TECHNICAL SPECIFICATIONS

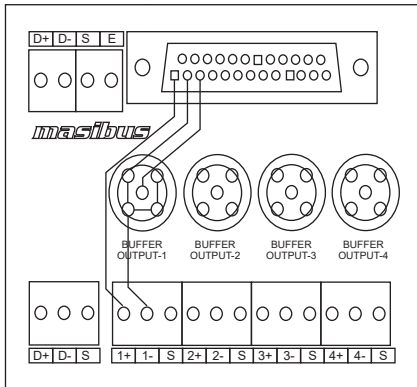Input			Buffered Output (Din-Rail Mount Field Interface Module)																																					
Accelerometer Input			No. of Output Per Card	4 nos.																																				
No of Modules	1 (4 ch), 2 (8ch)		Output Impedance	<100 ohms																																				
Type	Remote ICP piezoelectric accelerometer		Frequency Range	0.5Hz to 10KHz																																				
Sensitivity	100mV/g standard 500mV/g (On request)		Accuracy	0.25% of Full range																																				
Dynamic Range	80 g pk																																							
Measurement Parameters																																								
Parameter	Range (Field Selectable)	Resolution																																						
Acceleration	0 to 50.0g (RMS, Pk)	0.1g																																						
Velocity	0 to 100.0mm/sec (RMS, Pk)	0.1mm/sec																																						
Displacement	0 to 2000microns (Pk-Pk)#	1 micron #Derived peak																																						
Sensor Excitation Current	4 mA approx.		Field Interface Module (BNC Port)																																					
Scan Time	50 mSec/channel																																							
Frequency Range (Factory Set)	High pass: 2.5Hz,5Hz,10Hz Low pass: 1KHz,2.5KHz,10KHz -3dB filter accuracy : ± 10%																																							
Accuracy	± 2% of full span (Input to display)																																							
Analog Input (Optional)			Data Logging (Optional)																																					
No. of AI Modules	1 (8 ch.)		Memory	25MB (Periodic), 7MB (Event)																																				
Input Type	Thermocouple, RTD, voltage, current		Logged Data Retrieval	VIA mVSCAN Software																																				
Input Range	Refer table-1		Min. Periodic Log Time	1 min																																				
Accuracy	0.1% FS		No. of Records	101888 X $\left[\frac{256}{(2X\text{No. of Ch}) + 12} \right]$																																				
ADC Resolution	17 bits		Power Supply																																					
Display Resolution	0.1 / 1.0 °C		Voltage	85-265VAC, 50/60 Hz / 100-295 VDC 18 - 36VDC (Optional) 16VA (Max.) [85-265V AC] 8VA (Max.) [18-36VDC]																																				
Sampling Rate	T/C & Voltage/current: 50mSec/channel RTD: 100mSec/channel		Power Consumption																																					
Display Scan Rate	1 to 99 Sec (Programmable)		Isolation (Withstanding voltage) Between primary terminals* and secondary terminals**: At least 1500 V AC for 1 minute Between primary terminals* and grounding terminal: At least 1500 V AC for 1 minute Between grounding terminal and secondary terminals**: At least 1500 V AC for 1 minute Between secondary terminals**: At least 500 V AC for 1 minute * Primary terminals indicate power terminals and relay output terminals. **Secondary terminals indicate I/O signal and Communication O/P. Insulation resistance: 20MΩ or more @ 500 V DC between power terminals and grounding terminal																																					
CJC	Auto/ manual/ external for T/C type																																							
Sensor Open	All inputs except 0-5V, 0-10VDC																																							
Sensor Burnout Current	0.4uA																																							
RTD Excitation Current	250uA (Approx.)		Physical																																					
NMRR	> 40dB		Size (in mm)	144 (H) X 72 (W) X 165 (D)																																				
CMRR	> 120dB		Panel Cutout (in mm)	137 (H) X 68.5 (W)																																				
Temp-Co	< 100ppm/°C		Depth Behind Panel (in mm)	155 / 203 (With cable connector)																																				
Input Impedance	> 1MΩ		Mounting	Panel mount (Standard)																																				
Max. Voltage	20VDC		Weight	1.25 Kg																																				
Connector Type	24 Pin rectangular connector		Enclosure Material	Extruded aluminum																																				
Display and Keys			Protection	IP20 (Overall), IP55 (Front fascia)																																				
Channel Number	2-Digit, 0.56", green seven segment LED		Environmental																																					
Measuring Parameter Value	4-Digit, 0.56", red seven segment LED		Operating Temperature	-10 to 55 °C																																				
Engineering Unit	6-Digit, 0.3", orange alphanumeric LED		Storage Temperature	0 to 80 °C																																				
Status LEDs	Manual, run, flt, Tx/Rx, relay status		Humidity	20 to 95 % RH Non-condensing																																				
Keys	2 X 4 For configuration, operation and calibration		Table 1: Display Range for Analog Input																																					
Output			<table><tr><th colspan="2">Input Type</th><th>Ranges</th></tr><tr><td rowspan="5">Thermocouple</td><td>E</td><td>-200 °C to 1000 °C</td></tr><tr><td>J</td><td>-200 °C to 1200 °C</td></tr><tr><td>K</td><td>-200 °C to 1372 °C</td></tr><tr><td>T</td><td>-200 °C to 400 °C</td></tr><tr><td>B</td><td>400 °C to 1820 °C</td></tr><tr><td rowspan="5">RTD</td><td>R</td><td>0 °C to 1768 °C</td></tr><tr><td>S</td><td>0 °C to 1768 °C</td></tr><tr><td>N</td><td>-200 °C to 1300 °C</td></tr><tr><td>Pt100</td><td>-199.0 °C to 850.0 °C</td></tr><tr><td>Cu53</td><td>-210.0 °C to 210.0 °C</td></tr><tr><td rowspan="4">Voltage/Current</td><td>NI-120</td><td>-70.0 °C to 210.0 °C</td></tr><tr><td>0/4 to 20mA (Ext.250Ω)</td><td rowspan="3">-1999 to 9999</td></tr><tr><td>0/1 to 5V</td></tr><tr><td>-10 to 20 mV DC</td></tr><tr><td rowspan="2"></td><td>0 - 100 mV DC</td><td rowspan="2"></td></tr><tr><td>0 - 10 V DC</td></tr></table>		Input Type		Ranges	Thermocouple	E	-200 °C to 1000 °C	J	-200 °C to 1200 °C	K	-200 °C to 1372 °C	T	-200 °C to 400 °C	B	400 °C to 1820 °C	RTD	R	0 °C to 1768 °C	S	0 °C to 1768 °C	N	-200 °C to 1300 °C	Pt100	-199.0 °C to 850.0 °C	Cu53	-210.0 °C to 210.0 °C	Voltage/Current	NI-120	-70.0 °C to 210.0 °C	0/4 to 20mA (Ext.250Ω)	-1999 to 9999	0/1 to 5V	-10 to 20 mV DC		0 - 100 mV DC		0 - 10 V DC
Input Type		Ranges																																						
Thermocouple	E	-200 °C to 1000 °C																																						
	J	-200 °C to 1200 °C																																						
	K	-200 °C to 1372 °C																																						
	T	-200 °C to 400 °C																																						
	B	400 °C to 1820 °C																																						
RTD	R	0 °C to 1768 °C																																						
	S	0 °C to 1768 °C																																						
	N	-200 °C to 1300 °C																																						
	Pt100	-199.0 °C to 850.0 °C																																						
	Cu53	-210.0 °C to 210.0 °C																																						
Voltage/Current	NI-120	-70.0 °C to 210.0 °C																																						
	0/4 to 20mA (Ext.250Ω)	-1999 to 9999																																						
	0/1 to 5V																																							
	-10 to 20 mV DC																																							
	0 - 100 mV DC																																							
	0 - 10 V DC																																							
Alarm/Trip Output (Optional)																																								
Relay Output (Optional)																																								
Relays	8 Nos. per card																																							
Type	C- NO or C-NC (Jumper selectable)																																							
Rating	2A @ 250VAC / 30VDC																																							
Connector Type	25 D-Sub																																							
Open Collector (OC) Output (Optional)																																								
OC Outputs	16																																							
Type	Sinking																																							
Rating	100mA@30VDC																																							
Connector Type	25 D-Sub																																							
Analog Output (Optional)																																								
No of Outputs	Max. upto 8 nos. per card																																							
Output Types	0/4 to 20 mA (Isolated)																																							
Load	500Ω Max. (For current o/p) 3000Ω Min. (For voltage o/p)																																							
Accuracy	±0.1% Of full scale (Display to output)																																							
Communication Output																																								
RS-485-1 (Standard) & RS-485-2 (Optional)																																								
Protocol	Modbus-RTU slave																																							
Baud Rate	9600 or 19200																																							
Connector	2 Pin, plug-in terminals																																							
Ethernet (Optional)																																								
Protocol	Modbus - TCP/IP (Modnet) slave																																							
Baud Rate	10 Mbps																																							
Connector	RJ45																																							

TECHNICAL SPECIFICATIONS


Terminal Board for AI Module (Optional)

Input Connection	MKKDS type connector screw up to 2.5mm ² conductor
O/P Connection	25 Pin D-Type plug in type connector
Size (L X W X H) in mm	90 X 90 X 75
Mounting	35 mm DIN-Rail

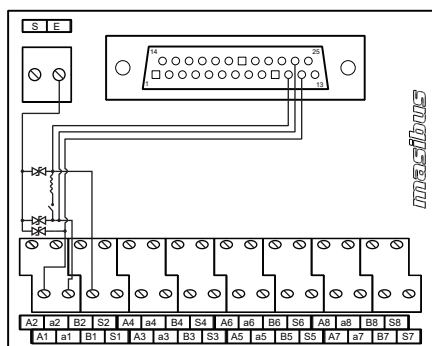

Terminal Board for Relay Module (Optional)

Input Connection	25 Pin D-Type plug in type connector
O/P Connection	MKDS type connector screw up to 2.5mm ² conductor
Size (L X W X H) in mm	90 X 90 X 75
Mounting	35 mm DIN-Rail

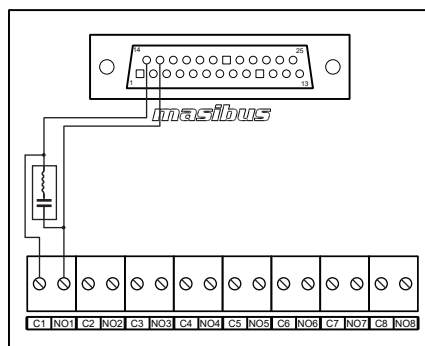

Ordering Code

Model	Analog Output										Power Supply		Communication		Data logging	
	1		2		3		4		5							
VMS4SE	XX		XX		XX		XX		XX		XX		XX		X	
	VI	4 Channel VIB I/P	N	None	N	None	N	None	N	None	U1	85-265 VAC	1X	1 x RS-485	N	No
			VI	4 Channel VIB I/P	AI	8 Channel Analog I/P	RL	8 Relay	4A	4 nos. 4-20mA o/p	U2	18-36 VDC	2X	2 x RS-485	Y	Yes
							OC	Open Collector O/P	8A	8 nos. 4-20mA o/p			1E	1 x RS-485 + 1 x Ethernet		
													2E	2 x RS-485 + 1 x Ethernet		

Note:

- Specify X from ordering code
- For analog O/P type; other than 0/4-20mA please contact factory
- Customer to specify required input type/range from table-1 for analog input at the time of order placement; else by default all analog channels will be calibrated for input RTD PT100 range

Field Interface Board and Pre-Fab Cable for Vibration Input Ordering Code (Standard)

Part Code	Description
m-VMS4SE-FIB-VI	4 Channel field Interface board for vibration input with BNC port for buffered output (4 Ch. (VI): 1 Module required & 8 ch. (VI): 2 Modules required)
VIC-2.5	4 Points input cable 25 core 2.5 mtrs long 4 Ch. (VI)

Prefab Cables Ordering Code (Optional)

Part Code	Description
AIC-2.5	8 Points input cable 25 core 2.5 mtrs long 8 Ch. (AI)
RLC-2.5	8 Relay output cable 25 core 2.5 mtrs long
OCC-2.5	16 OC output cable 25 core 2.5 mtrs long
AOC-2.5	Analog output cable 25 core 2.5 mtrs long

Field Interface Terminal Board and Pre-Fab Cable for Analog Input Ordering Code (Extra Cost)

Part Code	Description
m-VMS4SE-FIB-AI	8 Channel field interface board for analog input (8 Ch. (AI): 1 Module required)
m-AIC-2.5-R24J-D25M	8 Points analog input cable 25 core 2.5 mtrs long with DB25 connector (8 Ch. (AI): 1 Cable required)

Field Interface Terminal Board and Pre-Fab Cable for Relay Output Ordering Code (Extra Cost)

Part Code	Description
m-VMS4SE-FIB-RL	8 Channel field interface board for relay output
m-RLC-2.5-D25F-D25M	8 Relay output cable 25 Core 2.5 mtrs long with DB25 connector